

# EXIT PAD

## EMERGENCY EXITS PROTECTED IN ACCORDANCE WITH EN 179

The fittings of the Exit Pad series are high-quality emergency exit devices for doors in escape routes and can be combined with the components of the PHA 2000/PHB 3000 series. They are used in buildings with no public pedestrian traffic. It is expected that people using the building are familiar with the exits and their fittings, avoiding the likelihood of a panic situation developing.

All products of the Exit Pad series have been tested to and certified compliant with EN 179. They correspond to the requirements of Annex ZA to EN 179 and can therefore carry the **CE** mark of conformity.

### Benefits

#### For the trade

- All-in-one packaging for easy stocking
- Non-handed
- Universal use of PHT external fittings

#### For the installer

- Straightforward fixing
- Easy adjustment to different door widths and heights

#### For the architect/specifier

- High-quality appearance with no visible fixings
- Connecting rods with metal covers
- External fitting with DORMA lever handle or knob


#### For the user

- Simple operation
- Excellent quality ensures long lifespan

Data and features	Exit Pad <sup>1)</sup>	
	1-point	2-point
Standard doors (single-leaf/double-leaf)	●	●
Fire and smoke check doors (single-leaf/double-leaf) <b>F</b>	●	●
Glass doors	●	●
Door width	≤ 1300 mm	–
Door height	≤ 2270 mm	●
Max. door leaf weight (in kg)	200	200
Non-handed	●	●
Security anti-thrust latch	for standard doors	–
	for fire and smoke check doors	●
Unlocking via electric strike	○	○
External fittings PHT		
For standard doors and fire and smoke check doors	●	●
For door leaf thicknesses up to 60 mm		
Extended handle spindle and bolts for door leaf thicknesses of 60 – 105 mm	○	○
Approved to EN 179	●	●
CE mark for construction products	●	●

● Yes – No ○ Option

<sup>1)</sup> To achieve a three-point locking system, the Exit Pad can be used as a modular single-point locking device in combination with the PHX components from the PHA 2000/PHB 3000 series. In conjunction with PHX 05 door height max. 3400 mm (Doors higher than 2500 mm lie outside the scope of EN 179).

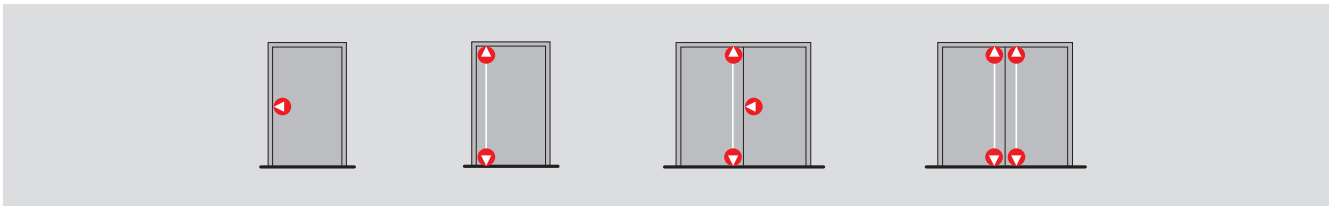


Exit Pad


Single-point locking



Two-point locking

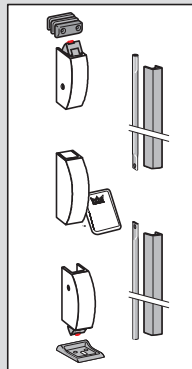

+  
PHT

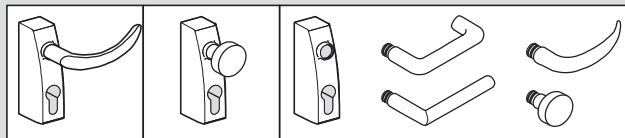


Security anti-thrust latch




The security anti-thrust latch prevents the latch from being pushed back by unauthorised means when it is in the closed position.

# EXIT PAD



## Single-point locking

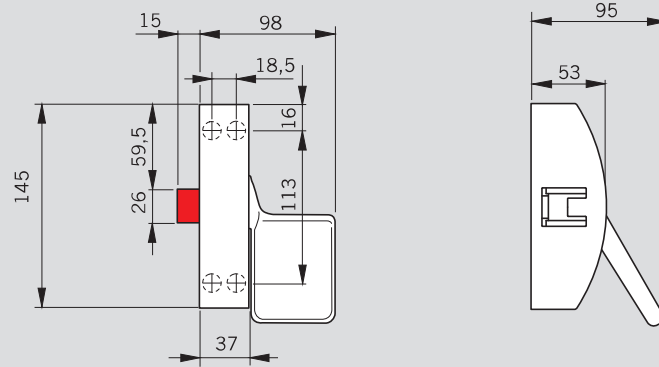

## Two-point locking

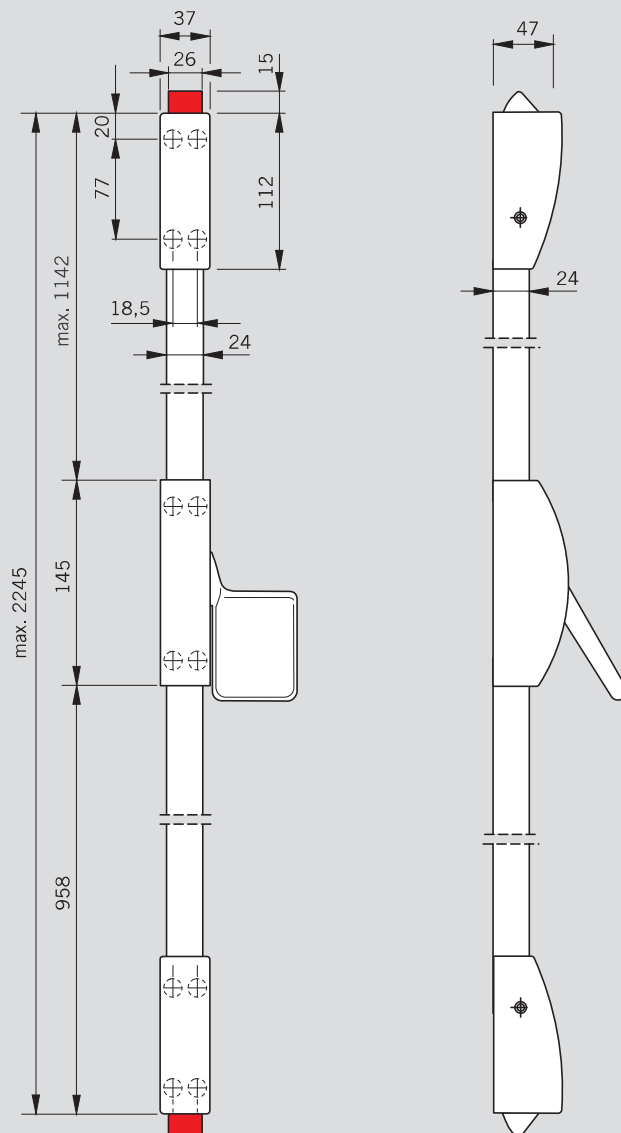

Applications and fixing details

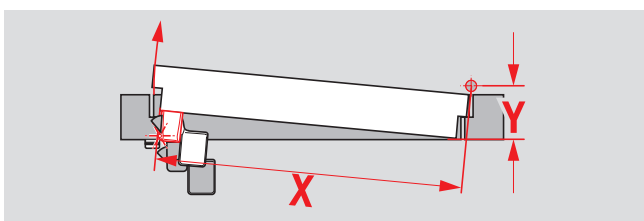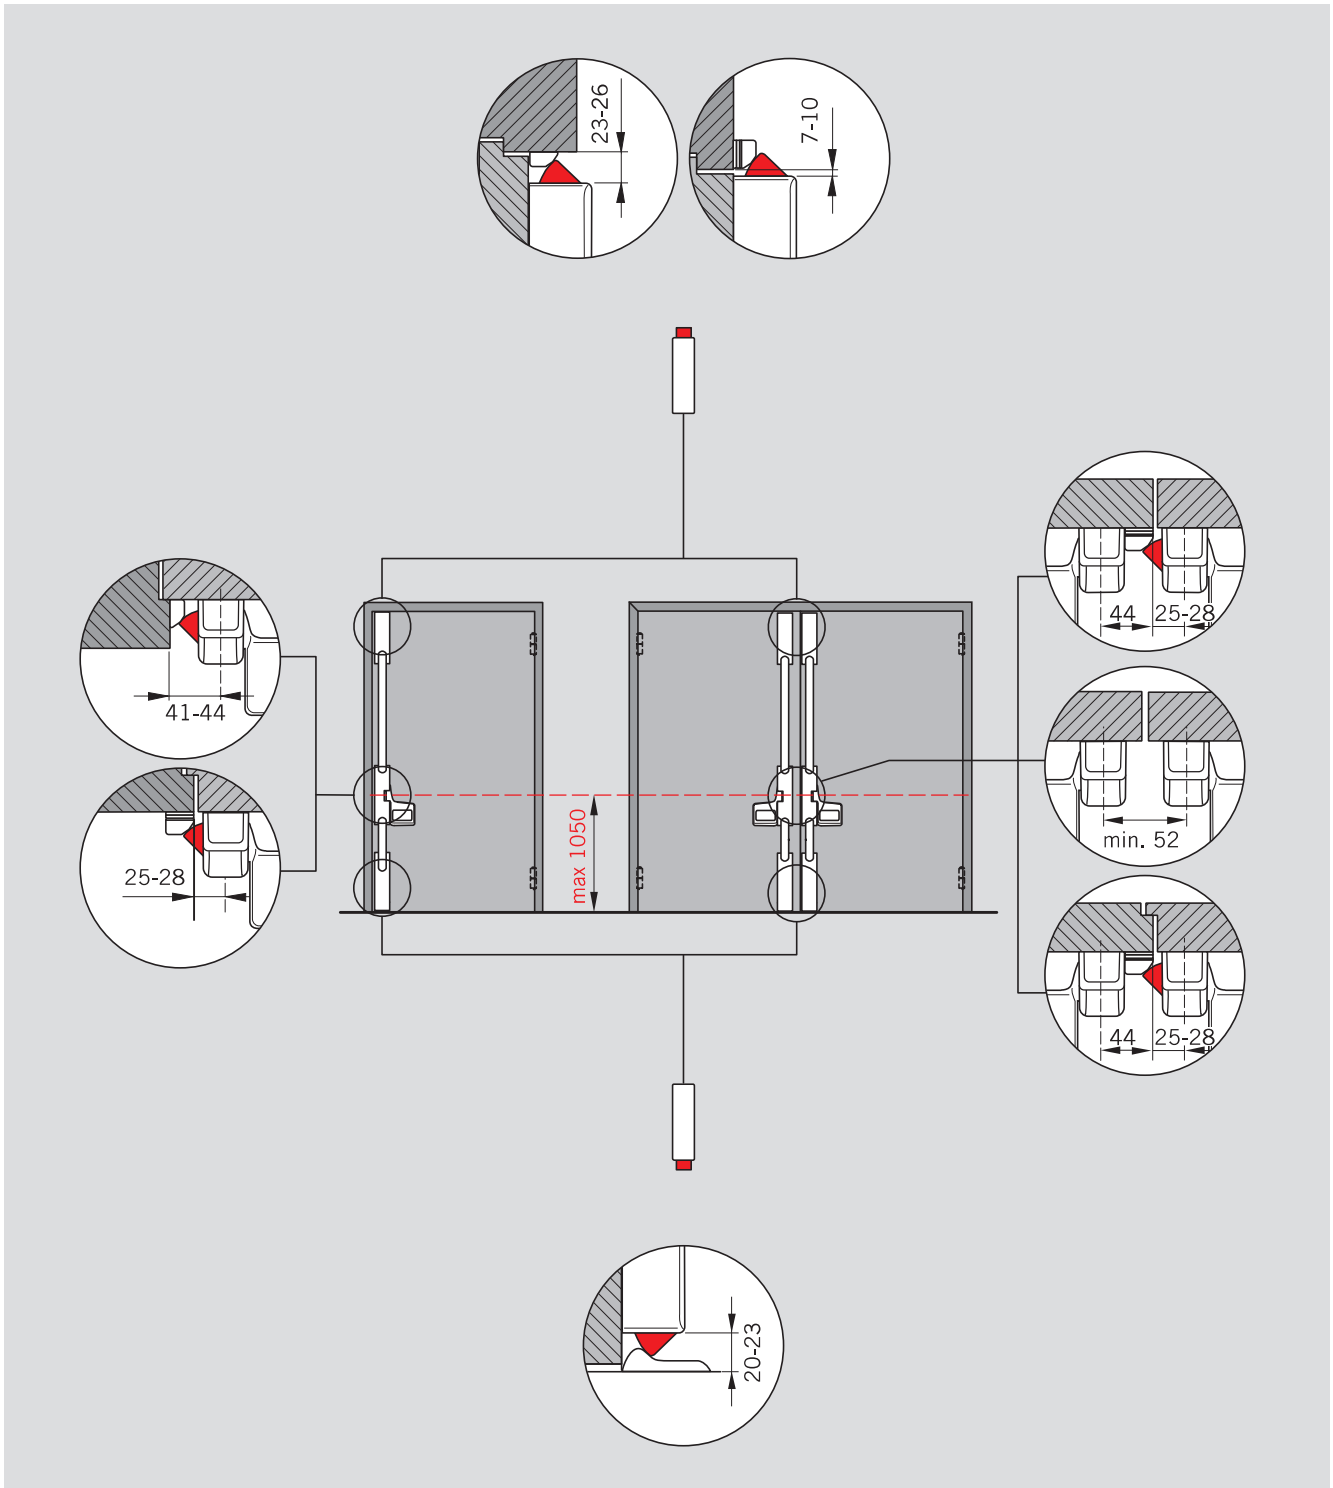






**Note**

It may be the case that the exit device cannot be installed based on standard measurements where the door situation is extreme, e.g. with a door width  $X < 1000$  mm combined

with a hinge offset  $Y > 90$  mm. DORMA will be glad to provide you with installation suggestions on request.


# EXIT PAD

	Specification text	Order No.
	<p><b>Exit Pad</b> Emergency exit device tested and approved to EN 179, non-handed. Can be unlocked electrically via electric strike. All products of the Exit Pad series carry the CE mark of conformity.</p>	
	<p><b>Exit Pad F</b> <span style="color: red;">F</span> Single-point locking, modular, for fire and smoke check doors, with security anti-thrust latch. Steel latch, steel latch keeper with spacer plates, plastic mounting bracket.</p> <p><input type="checkbox"/> silver finish</p> <p><input type="checkbox"/> white</p> <p><input type="checkbox"/> stainless steel finish</p>	<p>35014 21111001</p> <p>35014 21121001</p> <p>35014 21121010</p> <p>35014 21121004</p>
	<p><b>Exit Pad 2P</b> Two-point locking for standard doors, door heights up to 2270 mm, without security anti-thrust latch. Zinc die-cast latch, zinc latch keeper with spacer plates, plastic mounting bracket.</p> <p><input type="checkbox"/> silver finish</p>	<p>35014 22111001</p>
	<p><b>Exit Pad F 2P</b> <span style="color: red;">F</span> Two-point locking, for fire and smoke check doors, door heights up to 2270 mm, with security anti-thrust latch. Steel latch, steel latch keeper with spacer plates, plastic mounting backplate.</p> <p><input type="checkbox"/> silver finish</p> <p><input type="checkbox"/> white</p> <p><input type="checkbox"/> stainless steel finish</p>	<p>35014 22121001</p> <p>35014 22121010</p> <p>35014 22121004</p>

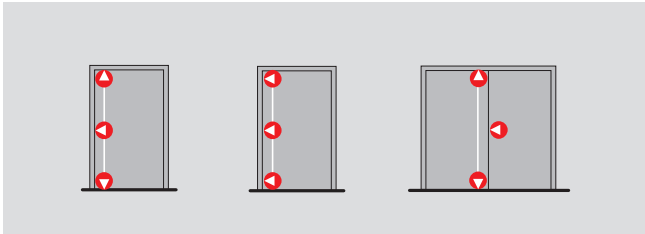


**Note**


To achieve three-point locking, the modular single-point locking Exit Pad can be used in conjunction with the components of the PHA 2000/ PHB 3000 series.

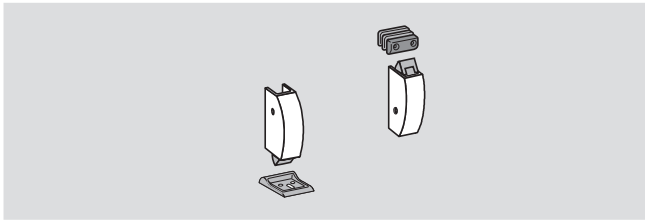


**PHX 02**

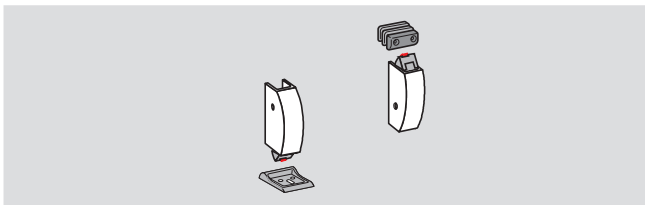


**PHX 03**

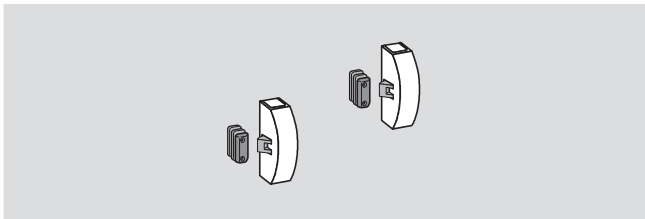


**PHX 06**

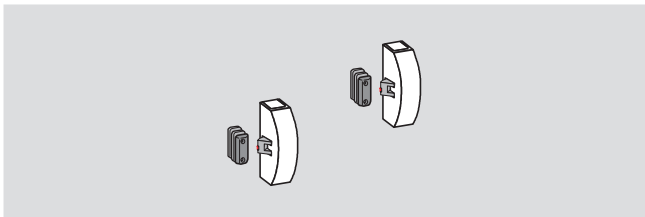

**PHX 07**

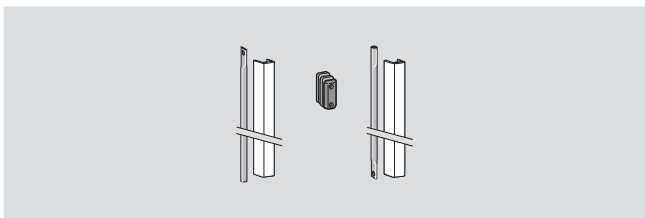

**PHX 04**

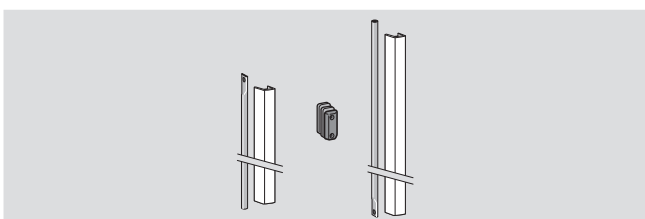

**PHX 05**